



MORENO VALLEY STANDARD NO. MVEU-717-0

72" X 94" PAD FOR PAD MOUNTED CAPACITORS

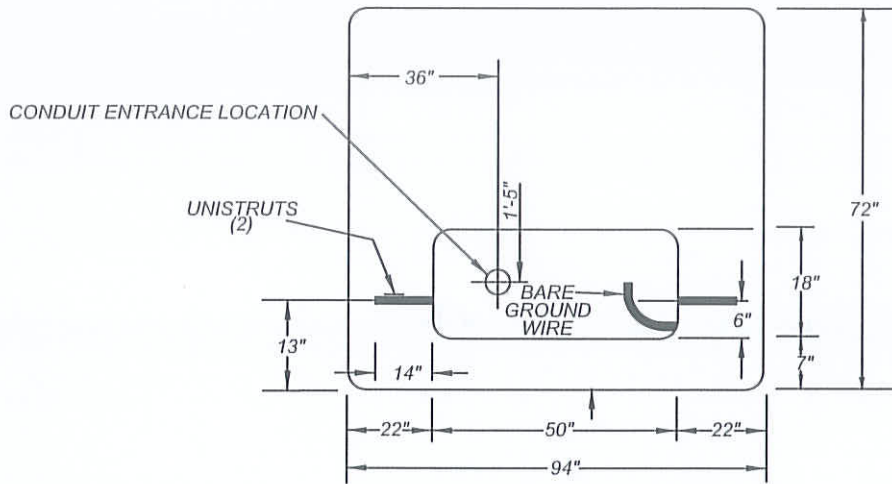

**BACK SIDE OF CAPACITOR**

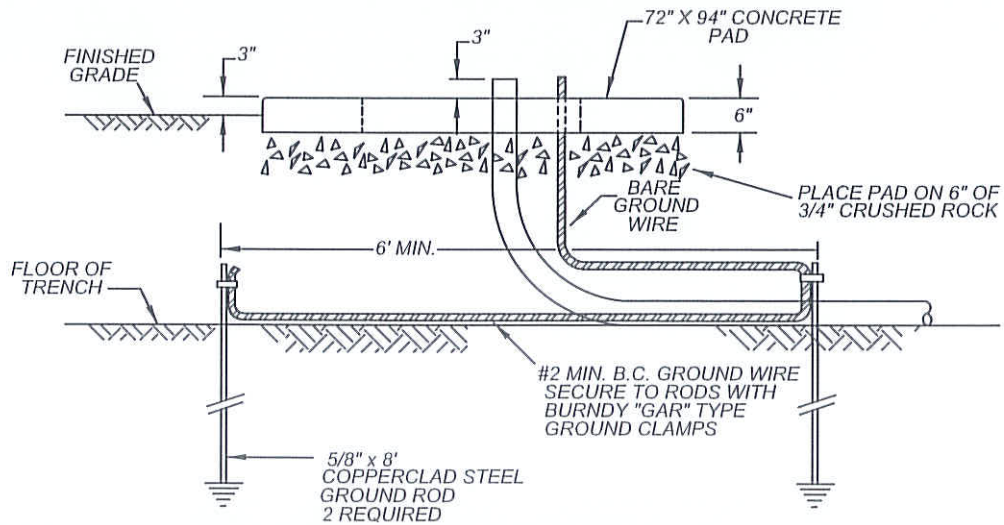


**FRONT SIDE OF CAPACITOR**

(\*) - AS MEASURED FROM EDGE OF PAD

**NOTES:**

1. 8' UNOBSTRUCTED FLAT WORKING CLEARANCE (\*) IS REQUIRED AT FRONT OF PAD.
2. 8' UNOBSTRUCTED FLAT WORKING CLEARANCE (\*) IS REQUIRED AT BACK OF PAD.
3. 3' CLEARANCE (\*) IS REQUIRED ON BOTH SIDES OF PAD.
4. REFER TO STDS MVEU-722-0 & MVEU-723-0 FOR ADDITIONAL DETAILS.

NOT TO SCALE



RECOMMENDED:  
*[Signature]* 1-15-14  
 DIVISION MANAGER DATE

APPROVED:  
*[Signature]* 1/29/14  
 PUBLIC WORKS DIRECTOR / DATE /  
 CITY ENGINEER

**CITY OF MORENO VALLEY**  
 PUBLIC WORKS DEPARTMENT - ELECTRIC UTILITY DIVISION

**72" X 94" PAD  
 FOR PAD-MOUNTED  
 CAPACITORS**

STANDARD PLAN  
**MVEU-717-0**

SHEET 1 OF 1