






Locate secondary street name sign on the bottom



NORTH or EAST
NOT TO SCALE

Street name sign (SNS) post to be a minimum of 36" from face of curb and 5' out from curb return (SNS ONLY)

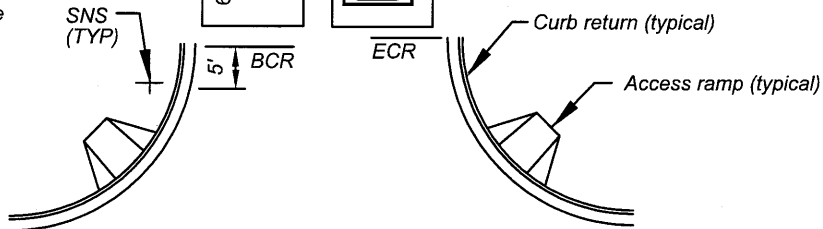

Secondary



Primary

Correct corner location per street classification
See Standard 400



Use equivalent metric
Exceptions as approved by City Engineer

Note: Street name signs for intersecting secondary streets do not show address block numbers

Street name signs for intersecting primary and secondary streets, and above, do show address block numbers

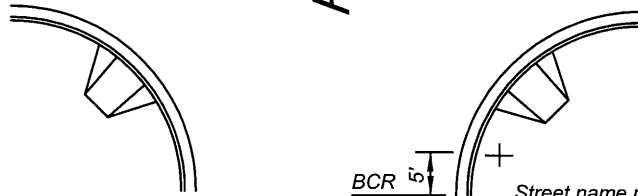

Street name post to be a minimum of 36" from face of curb and 5' out from curb return (SNS ONLY)




Locate secondary street name sign on the bottom

NOTES:

1.) ADDRESS BLOCK NUMBER POINTS IN THE LEADING DIRECTION - INCREASING ADDRESS NUMBERS FOR SOUTH AND EAST (##000➔) AND DECREASING ADDRESS NUMBERS FOR WEST AND NORTH (➔##999).

2.) SEE STD MVL-410E-0 FOR CORRECT CORNER LOCATION BASED ON STREET CLASSIFICATION.

NOT TO SCALE



RECOMMENDED:
EL 12/22/16
DIVISION MANAGER DATE

APPROVED:
[Signature] 1/20/17
PUBLIC WORKS DIRECTOR / DATE
CITY ENGINEER

CITY OF MORENO VALLEY

PUBLIC WORKS DEPARTMENT - TRANSPORTATION ENGINEERING DIVISION

STREET NAME SIGN PLACEMENT

STANDARD PLAN
MVLT-410D-0

SHEET 4 OF 5